



ILLIRICO SUPERIORE
TEST DATA

FOX
MARBLE

EN STANDARD


| | |
|---|--|
| General Colouring | White |
| Country of Origin | Kosovo |
| Petrographic Examination | Limestone - Dolostone |
| Application | Interior/Exterior |
| Finishes | Polished/Honed/Leathered/Bush Hammered |
| Abrasion Resistance (mm) | 20.5 |
| % Water Absorption at atmospheric pressure | 1.3% |
| Apparent Density (kg/m3) | 2700 |
| Compressive Strength (MPa) | Testing under way |
| Open Porosity | Testing under way |
| Flexible strength under concentrated load (MPa) | Testing under way |
| Slip Resistance | Testing under way |

ATSM Standard

| | |
|--|--------------|
| Petrographic Examination | Marble (III) |
| Abrasion Resistance (Ha) | 22.3 |
| Water Absorption at atmospheric pressure | 0.77% |
| Bulk Specific Gravity (kg/m3) | 2562 |
| Compressive Strength (MPa) | 145 |
| Modulus of Rupture (MPa) | 9.3 |

DISCLAIMER

These tests were carried out by a registered stone testing laboratory qualified and competent in performing such tests. The information contained is indicative only and cannot be relied upon as being information from Fox Marble.

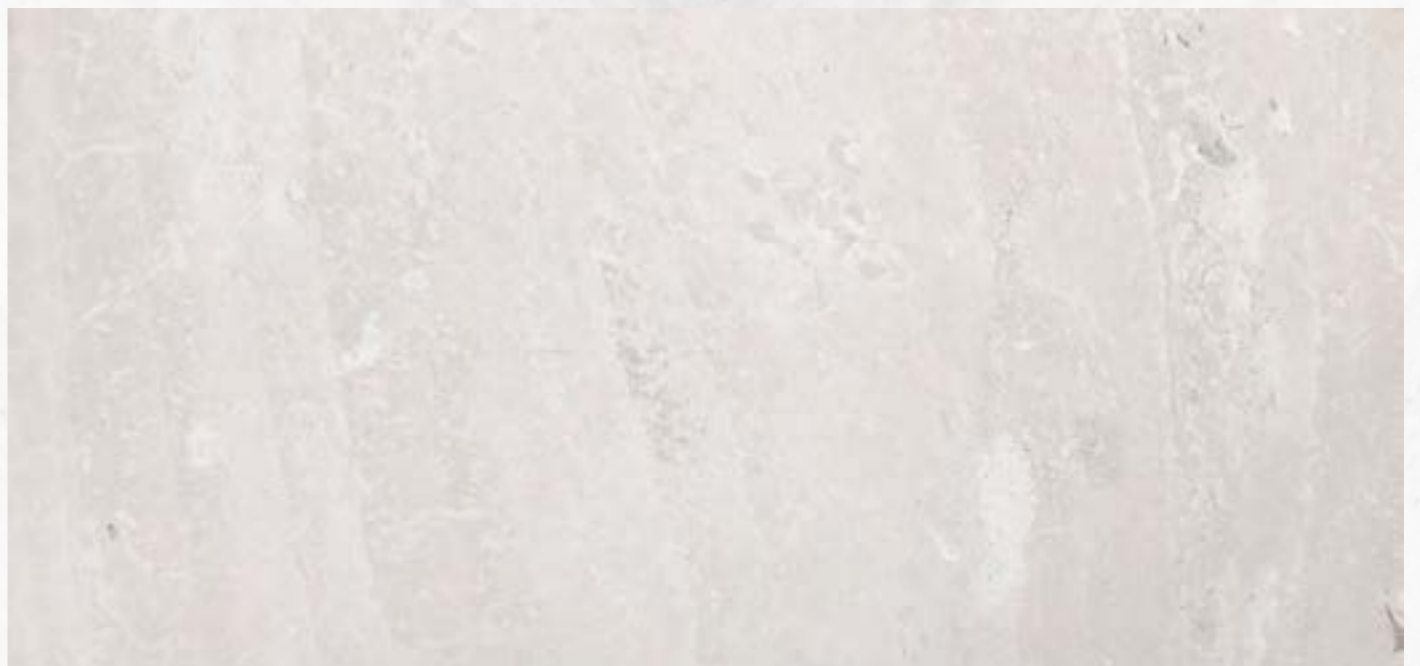



www.foxmarble.net
info@foxmarble.net
+44 0207 380 0999